



HTF FLOOR SANDER ABRASIVE SYSTEM

The latest advancement in floor sanding technology - a simple, effective and highly productive abrasive system designed for the orbital sanding and re-finishing of all types of wood flooring, including factory pre-finished floors.

DESCRIPTION

A mix of abrasive pad and adhesive backed abrasive sheets used for the sanding and re-finishing all types of wood flooring, and sanding between coats of finish. The red abrasive pad consists of a sandwich of two layers of random fibre abrasive equivalent to a 280 grit abrasive, separated by a layer of high-density foam. The foam, in combination with the two layers of fibre pad maximizes the life of the abrasive pad and maintains sander performance. The abrasive sheets used in combination with the abrasive pad are used for more aggressive sanding and feature a special anti-loading coating to maintain performance.


USES

A simple, highly productive abrasive system for use in a wide and varied range of applications from the preparations of newly laid raw wood floors to the refinishing of all types of wood flooring including factory pre-finished. The red abrasive pad sands evenly across the whole of its surface area providing consistent abrasion on all types of floors and finishes. The abrasive sheets, working in combination with the abrasive pad, provide more aggressive abrasion down to 40 grit for the removal of light blemishes and scratches. This system can be safely used on stained floors and factory pre-finished floors where the integrity of a base coat/stain must be maintained.

FEATURES

A new abrasive system that harnesses the power and dynamics of the HTF-2 Floor Sander that is simple to use making it easy for all users to get a high quality professional finish.

HTF Abrasive System

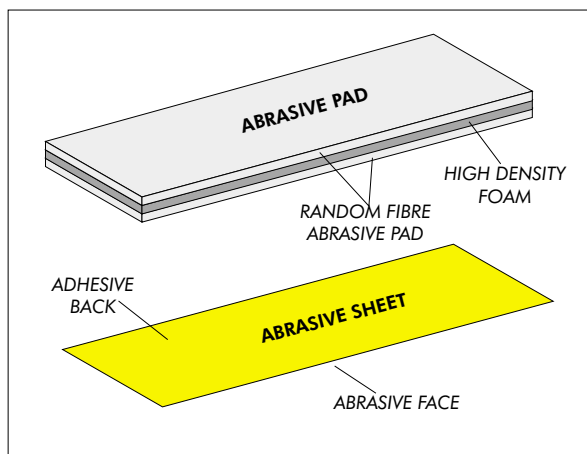

SPECIFICATION

- PSTK:** 01768 - Abrasive Pad
(Pack of 2, 10 packs per box)
01769 - Abrasive Pad
(Box 20)
- Type:** Random Fibre Abrasive and high-density foam, 280 grit.
- Size:** 400mm x 115mm (15.75" x 4.5")
- PSTK:** 01750
Floor Sander Abrasive Sheet 40G
01751
Floor Sander Abrasive Sheet 60G
01752
Floor Sander Abrasive Sheet 80G
01754
Floor Sander Abrasive Sheet 120G
01756
Floor Sander Abrasive Sheet 180G
- Type:** Abrasive Sheet with anti-loading coating and adhesive back.
- Size:** 400mm x 115mm (15.75" x 4.5")
- Pack:** 50 Sheets per box.

Abrasive kits also available, please ask for details.

HTF ABRASIVEGUIDE

ABRASIVE GRADE	APPLICATION	FLOOR TYPE
Abrasive Sheet 40G (Coarse)	For the rapid removal of stock and where a deep cut is required.	Use on solid raw wood floors. Not recommended for factory finished or laminate flooring systems.
Abrasive Sheet 60G (Medium)	In progression from coarse grade to first sanding on smooth surfaces requiring less stock removal. Removal of stains and old finish from the sub-surface of the floor after stripping off surface coatings with 80 grade abrasive.	Solid raw wood floors, and floors where an existing stain or finish is to be completely removed from the wood prior to new finish being applied.
Abrasive Sheet 80G (Medium)	Medium stock removal. Rapid removal of surface finishes.	Suitable for all floor types, however, care should be taken on factory pre-finished floors where the integrity of seals and stains should be maintained.
Abrasive Sheet 120G (Fine)	Light stock removal and where only a minor dimensional change is required in the floor surface.	First sanding of floors that require re-finishing without the removal of old surface coatings and where the integrity of seals and stains must be maintained.
Abrasive Sheet 180G (Extra Fine)	Negligible stock removal prior to application of finish.	Suitable for all floor types.
Abrasive Pad 280G (Finishing) and flexible backing pad for abrasive sheets listed above.	Preparation for high quality finished surface.	All floor types. Use to sand between coats of finish especially water based stains and varnishes.

DO NOT OVER-SAND USE ONLY AS HEAVY GRADE ABRASIVE AS IT TAKES TO DO THE JOB.
PROGRESS FROM FIRST GRADE USED THROUGH FOLLOWING GRADES TO REMOVE ALL VISIBLE
SANDING MARKS DO NOT MISS A GRADE.